


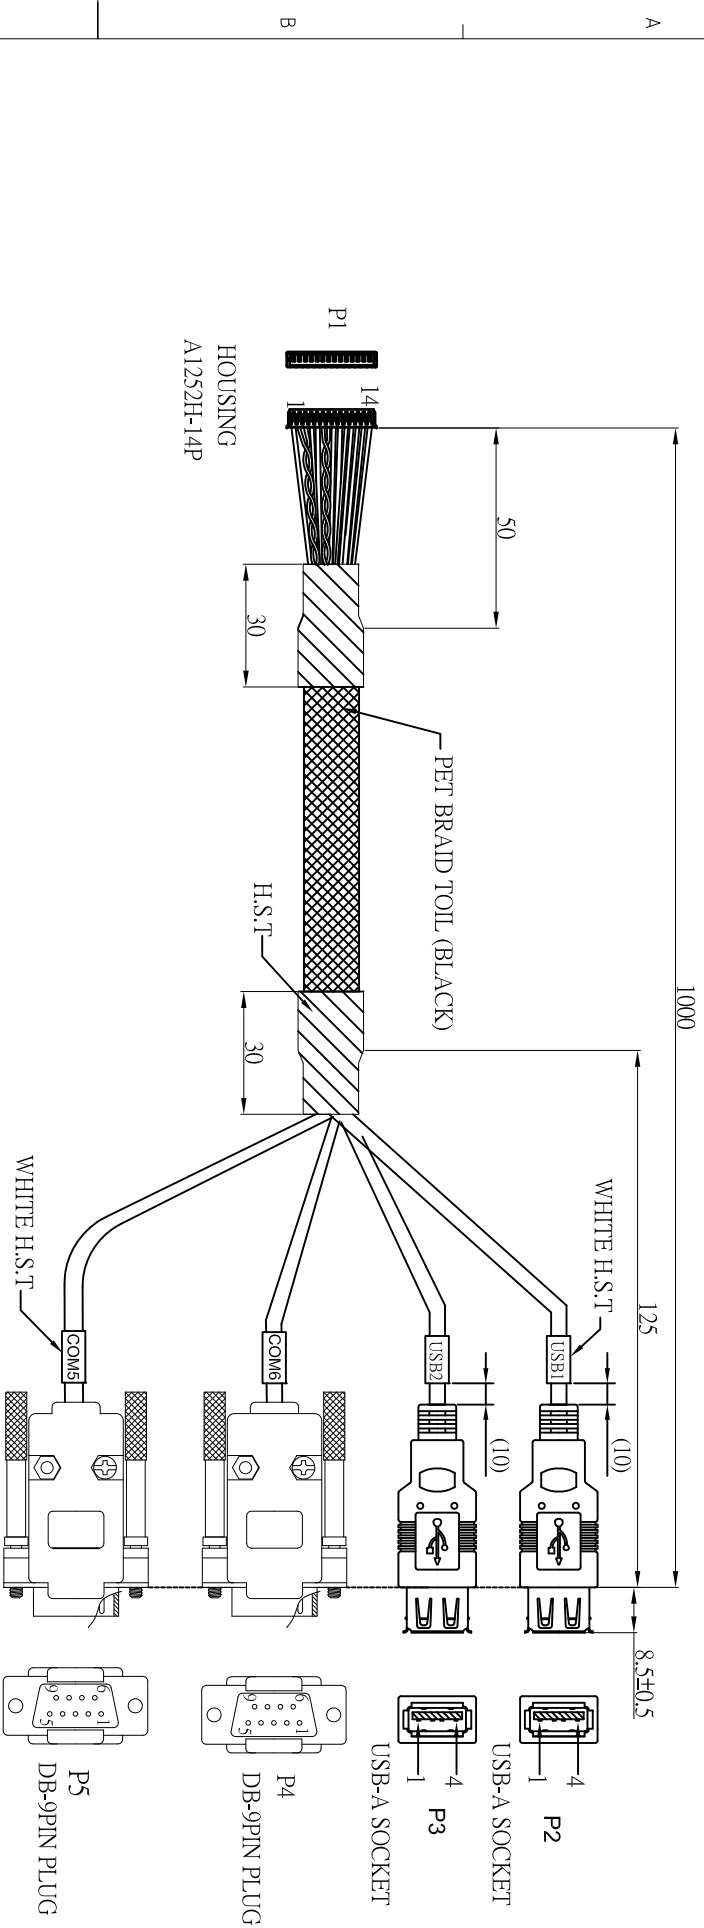

CONNECTOR WIRING:				
P1	P2	P3	P4	P5
1	1			WIRE
2	3			RED (B)
3	2			GREEN (B)
4	4			WHITE (B)
				BLACK (B)
				GROUND (B)
				RED (B)
				GREEN (B)
				WHITE (B)
				BLACK (B)
				GROUND (B)
				WHITE (A)
				GREEN (A)
				GREY (A)
				WHITE (A)
				GREEN (A)
				GREY (A)

NOTES:

1. WIRE:

A: 26 AWGx3C OD3.8 BLACK PVC CABLE

B: UL2725#28x1P+28x2C+ALF+DRAIN+BRAID OD4.0 BLACK PVC CABLE

2. ASSEMBLE IN ACCORDANCE WITH IPC-A-620

3. ASSEMBLE TO CONFORM TO DIRECTIVE 2002/95/EC (RoHS)

4. TEST:

FUNCTION 100% TEST, NO OPEN, NO SHORT, NO INT,

No	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY	UL No.	DWG: FENNY	CHECK:	APPROVED:
1									

EST		☒ RoHS	☐ REACH	☐
WWW. ESTCABLE.COM		DESCRIPTION: VGA CABLE		
CN: XX		DRAW NO: E-02-007		PAGES: 1 OF 2
ABO	UNT	TOL	P/N: E-02-007	
10	10	±1	DATE: 2013.8.12	
50	50	±3		
100	100	±5		
500	500	±10		
1000	1000	±30		
2000	2000	±50		
		SCALE: N/A		UNIT: MM
		SAMPLE No:		

