


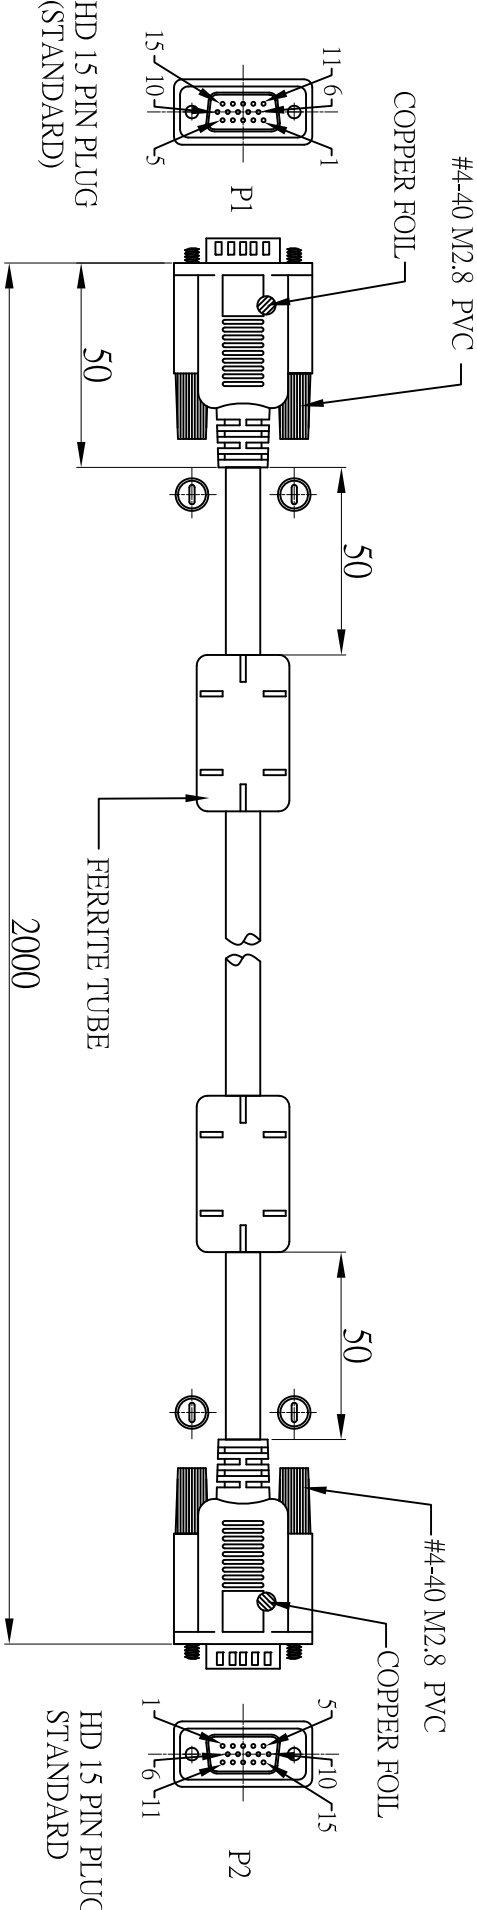

CONNECTOR WIRING:		
P1	P2	WIRE
1 — ○	1	RED #28
6 — ●	6	GROUND
2 — ○	2	GREEN #28
7 — ●	7	GROUND
3 — ○	3	BLUE #28
8 — ●	8	GROUND
4 — X	4	BLACK #26
14 — X	14	BROWN #26
5 — X	5	ORANGE #26
12 — X	12	YELLOW #26
9 — X	9	WHITE #26
10 — X	10	VIOLET #26
13 — X	13	PINK #26
11 — X	11	WHITE/BLACK #26
15 — X	15	WHITE/RED #26
Shell — ●	Shell	GROUND

- NOTES:
- 1. WIRE: UL20276(11354 (28AWG+S.S.)x1.8 x3C+ 26AWGx4P+26 AWGx1C) +ALF+DRAIN+BRAID(85%) OD8.5 BLACK PVC CABLE
 - 2. ASSEMBLE IN ACCORDANCE WITH IPC-A-620
 - 3. ASSEMBLE TO CONFORM TO DIRECTIVE 2002/95/EC (RoHS)
 - 4. TEST: FUNCTION 100% TEST, NO OPEN, NO SHORT, NO INT,

No	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY	UL No.
1						

EST

WWW.ESTCABLE.COM

☒ RoHS

☐ REACH

☐

DESCRIPTION: VGA CABLE

DRAW NO: E-02-011

PAGES: 1 OF 2

DATE: 2014.6.12

ABO

UNT

TOL

10

10

±1

50

50

±3

100

100

±5

100

500

±10

500

1000

±30

1000

2000

±50

P/N: E-02-011

SCALE: N/A

SAMPLE No:

UNIT: MM

DWG: FENNY

CHECK:

APPROVED: