



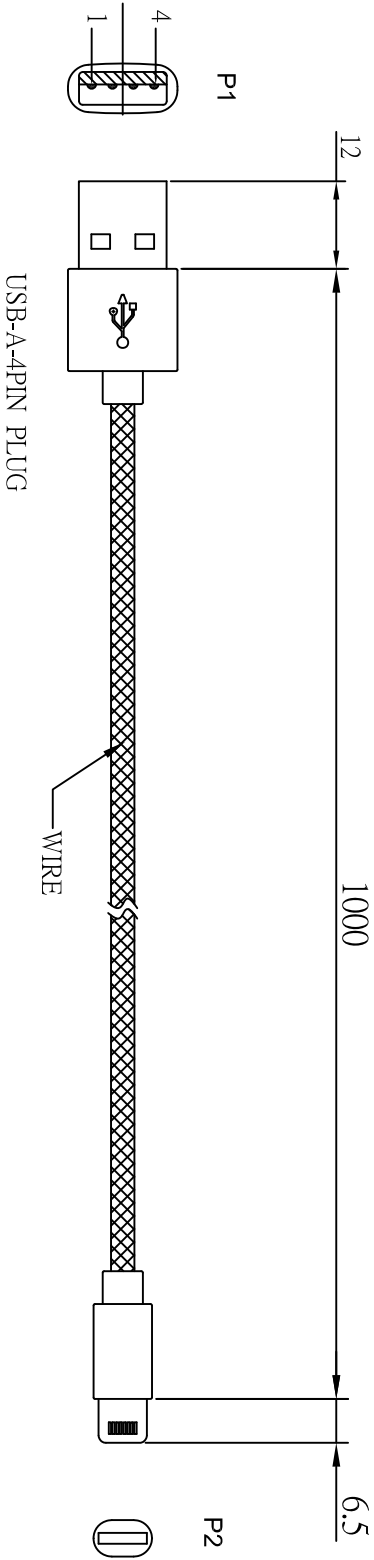

CONNECTOR WIRING:

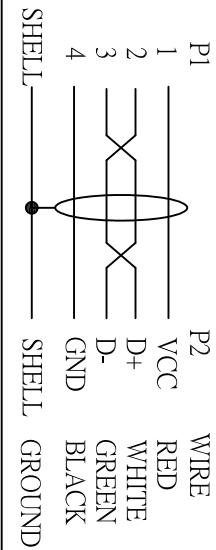

NOTES:

1. WIRE: 30 AWGx2C+26 AWGx2C]x2.8+PP BRAID OD3.2
2. ASSEMBLE IN ACCORDANCE WITH IPC-A-620
3. ASSEMBLE TO CONFORM TO DIRECTIVE 2002/95/EC (RoHS)
4. TEST:
FUNCTION 100% TEST, NO OPEN, NO SHORT, NO INT,

No	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY	UL No.	DWG: FENNY	CHECK:	APPROVED:
EST WWW.ESTCABLE.COM DESCRIPTION: USB CABLE DRAW NO: E-03-006 PAGES: 1 OF 2 DATE: 2015.6.12 SCALE: N/A SAMPLE No: UNIT: MM									
ABO UNT TOL P/N: E-03-006 DATE: 2015.6.12 SCALE: N/A SAMPLE No: UNIT: MM									
10 50 100 500 1000 2000 ±1 ±3 ±5 ±10 ±30 ±50 P/N: E-03-006 DATE: 2015.6.12 SCALE: N/A SAMPLE No: UNIT: MM									
10 50 100 500 1000 2000 ±1 ±3 ±5 ±10 ±30 ±50 P/N: E-03-006 DATE: 2015.6.12 SCALE: N/A SAMPLE No: UNIT: MM									
10 50 100 500 1000 2000 ±1 ±3 ±5 ±10 ±30 ±50 P/N: E-03-006 DATE: 2015.6.12 SCALE: N/A SAMPLE No: UNIT: MM									