
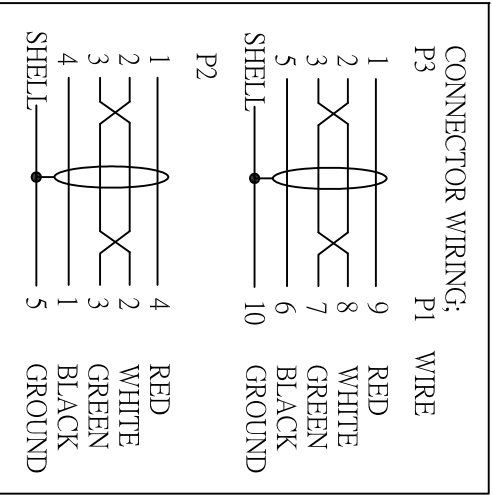


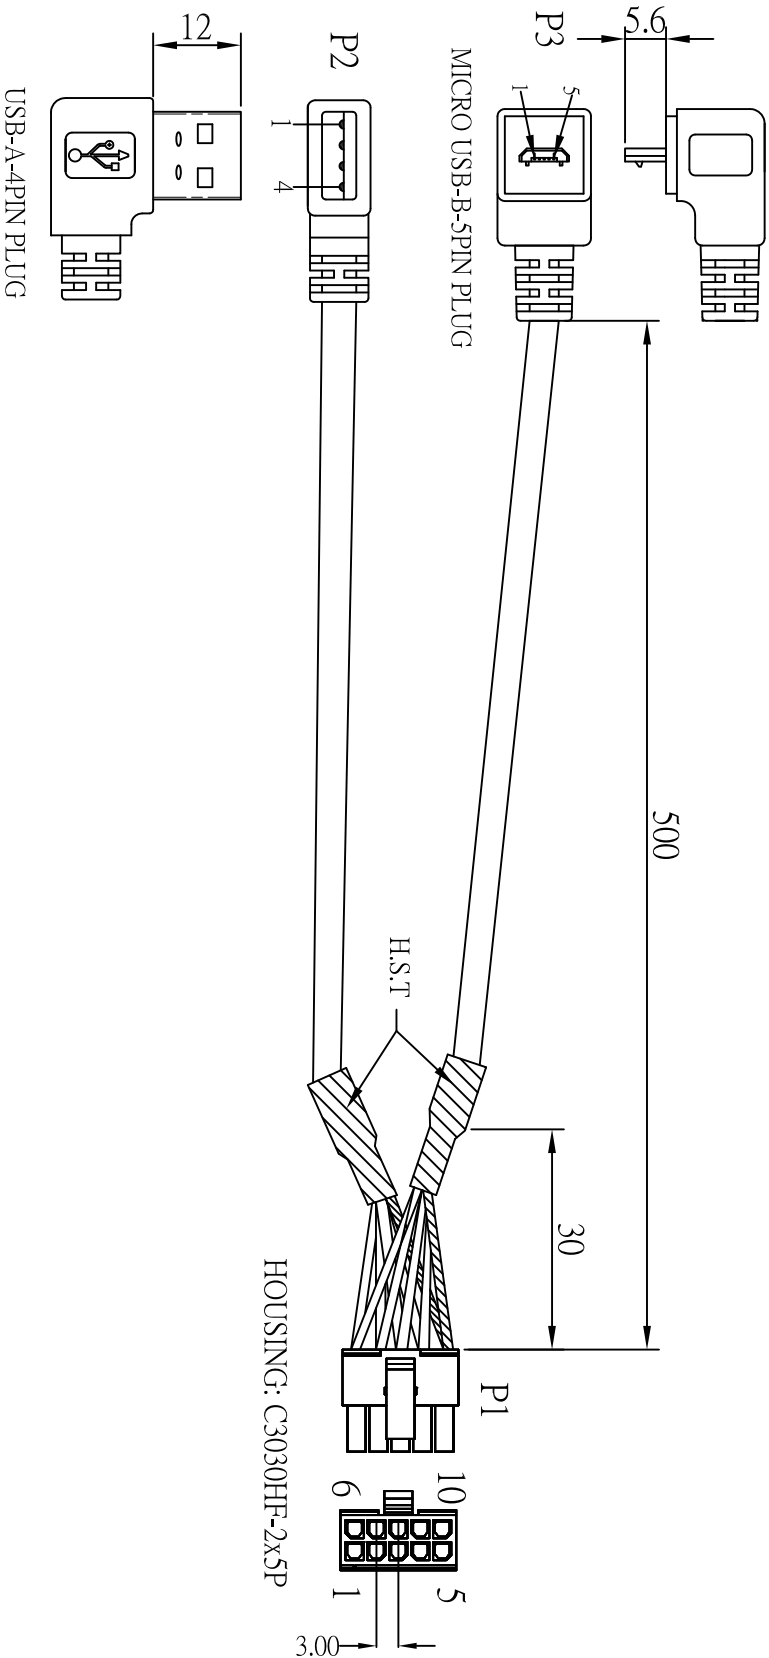

- NOTES:
1. WIRE: UL2725[28 AWGx1P + 28 AWGx2C + ALF+DRAIN+BRAID] OD4.0 BLACK CABLE
 2. ASSEMBLE IN ACCORDANCE WITH IPC-A-620
 3. ASSEMBLE TO CONFORM TO DIRECTIVE 2002/95/EC (RoHS)
 4. TEST: FUNCTION 100% TEST, NO OPEN, NO SHORT, NO INT,

No	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY	UL No.	DWG: FENNY	CHECK:	APPROVED:
1									

EST			☒ RoHS	☐ REACH	☐
WWW. ESTCABLE.COM			DESCRIPTION: USB CABLE		
CN: XX			DRAW NO: E-03-011		PAGES: 1 OF 2
ABO	UNT	TOL	P/N: E-03-011		DATE: 2015.6.12
10	10	±1			
50	50	±3			
100	100	±5			
100	500	±10	SCALE: N/A		UNIT: MM
500	1000	±30			
1000	2000	±50	SAMPLE No:		