


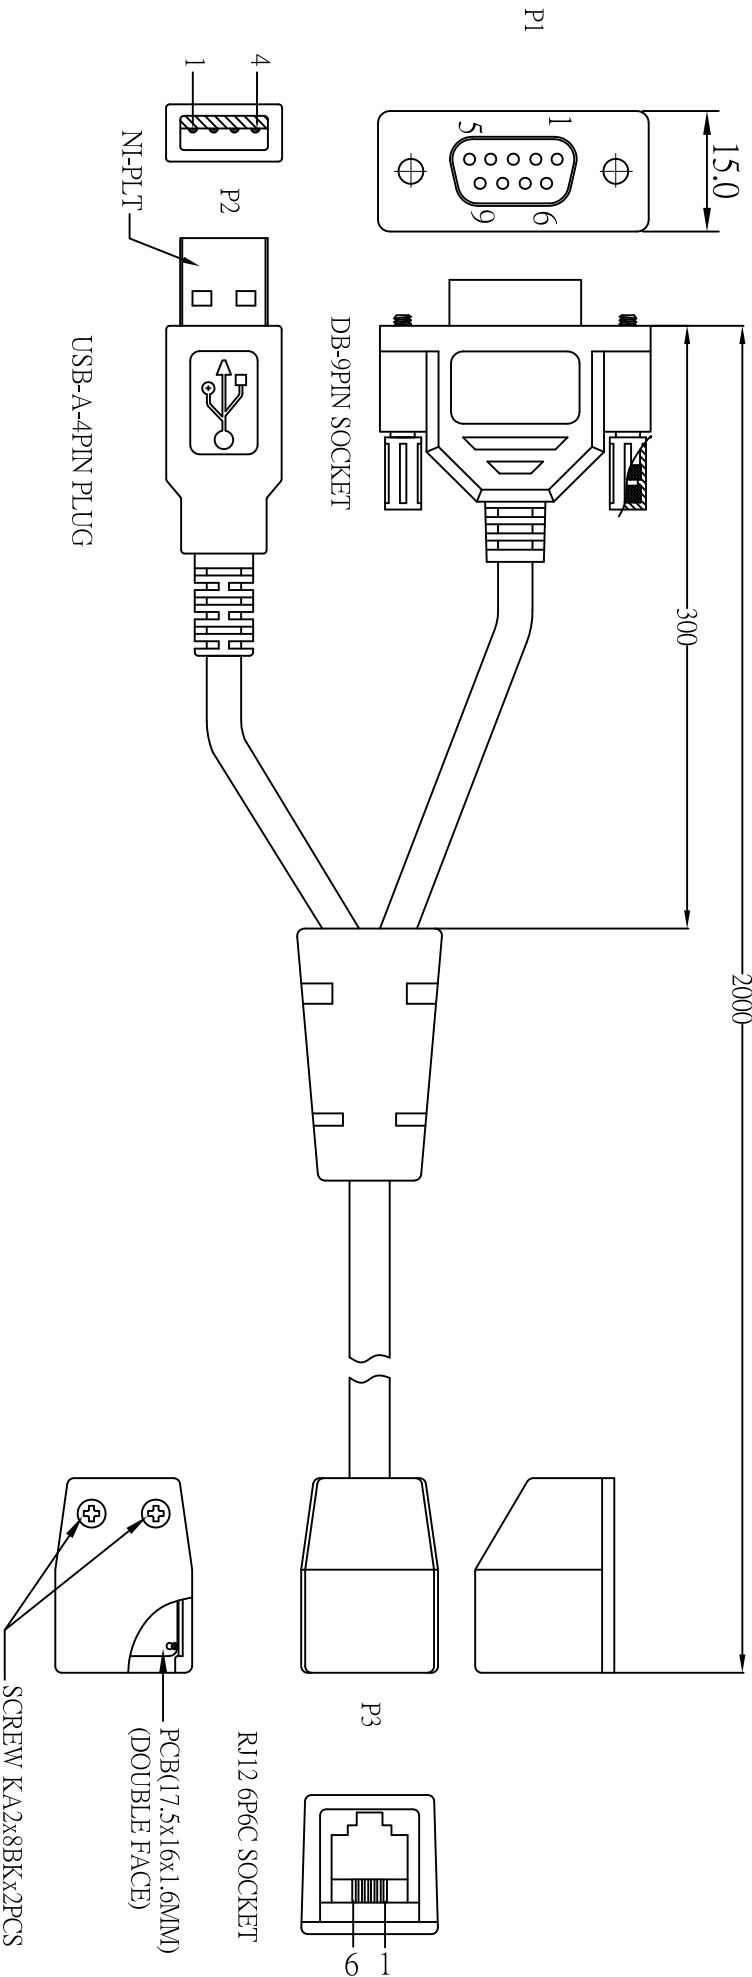

NOTES:

- 1. WIRE: UL2464 28 AWGx2C+24AWGx2C OD4.2 BLACK PVC CABLE
- 2. ASSEMBLE IN ACCORDANCE WITH IPC-A-620
- 3. ASSEMBLE TO CONFORM TO DIRECTIVE 2002/95/EC (RoHS)
- 4. TEST:
FUNCTION 100% TEST, NO OPEN, NO SHORT, NO INT.

CONNECTOR WIRING:			
P1	P2	P3	WIRE
1	4	2	BLACK (#24)
2		4	WHITE (#28)
3		5	GREEN (#28)
4		6	RED (#24)
5			
6			
7			
8			

UL1061#24 L=20MM

No	DESCRIPTION	MATERIALS	VENDOR	COLOR	QTY	UL No.	DWG: FENNY	CHECK:	APPROVED:
1									

EST			☒ RoHS	☐ REACH	☐
WWW. ESTCABLE.COM			DESCRIPTION: WIRING HARNESS		
CN: XX			DRAW NO: E-10-008		PAGES: 1 OF 2
ABO	UNT	TOL	P/N: E-10-008		DATE: 2014.8.12
10	10	±1			
50	50	±3			
100	100	±5			
500	500	±10	SCALE: N/A		UNIT: MM
1000	1000	±30	SAMPLE No:		
2000	2000	±50			